

URC-300™ Transceiver

Maximized RF Performance - Redefining Software Defined



Significant RF improvement over the
URC-200 (V2) LOS Transceiver

8.33kHz ETSI EN 300 676-1 Compliance
and CE marking for global operations

Designed to meet stringent FAA requirements

Customizable, software-defined platform enables future
field-upgradeable enhancements

Compatible with many legacy URC-200 family accessories

Improved Ground-to-Air-Communications

The new software-defined URC-300 Transceiver improves ground-to-air communications with an architecture that enables users to upgrade fielded radios as new technology becomes available. The URC-300 retains a familiar user-friendly interface from the URC-200 (V2) as well as many of the legacy accessories.

- UHF / VHF AM Voice; ETSI EN 300 676-1 compliant for both 8.33kHz and 25kHz
- Separate DC input powers radio and charges battery
- Optional accessories to power from AC or DC source
- Built-in power conditioning replaces external filter accessories
- Smaller size and less weight than the URC-200 (V2); ideal for emergency grab-and-go
- Side-by-side radios fit into a 19" rack for rackmount applications
- Web-based configuration and monitoring tool for maintainers
- Redesigned user interface with large, user-friendly display

Future, Field-Upgradeable Enhancements

- FM voice
- 50W power amplifier
- Additional accessories for vehicular, shipboard, backpack and rackmount applications
- Cipher text (data)
- 30 - 90 MHz frequency band
- Remote Control Unit
- ED-137 VoIP Gateway Adapter
- Frequency agile cosite filter
- Adaptive Noise Reduction (ANR)


Additional Certifications

- MIL-461G EMI/EMC
- CE / RoHS / REACH / Radio Equipment Directive
- FCC

URC-300™ Transceiver

Features

- **Highly Versatile**
 - VHF and UHF AM capability provides interoperability with a variety of RF systems
 - Adaptable to many applications, including manpack, rackmount, vehicular and intercom
- **Remote Control**
 - SNMP V3 command / control / BIT
- **Intuitive Front Panel Control**
 - All parameters are easy to set and access via the front-panel control and web-based GUI
- **Web-based provisioning tool for maintainers**

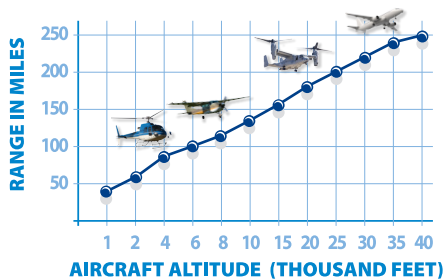

Optimal Line-of-Sight (LOS) transmission distances relative to aircraft altitude

Technical Specifications

General

- **Frequency range:**
 - VHF: 115 MHz to 150 MHz (AM)
 - VHF: 115 MHz to 173.995 MHz (Future FM)
 - UHF: 225 MHz to 399.995 MHz
- **Tuning increments:**
 - 25 kHz, 12.5 kHz, 5 kHz and 8.33 kHz
- **Channel Spacing:**
 - 25 kHz, 8.33 kHz, ETSI EN 300 676-1 Compliant
- **Frequency stability:**
 - ± 1 PPM
- **20 Channel Presets: Independently programmable transmit and receive**

Receiver Characteristics

- **Sensitivity:**
 - AM PT: -102 dBm (-103.5 dBm typical)
 - Dynamic range: ≥ 115 dB
- **Cross modulation ≥ 80 dB**
- **Audio noise (S + N) / N: ≥ 40 dB**
- **Image response: ≥ 80 dB**
- **Spurious response: ≥ 70 dB (≥ 80 dB typical)**
- **Squelch range: Operator adjustable from below sensitivity to above -80 dBm**
- **Adjacent channel rejection:**
 - 25 kHz: ≥ 60 dB; 8.33 kHz: ≥ 60 dB
- **FM Broadcast Intermod Immunity: ≥ 95 dB**

Transmitter Characteristics


- **Output power:**
 - 1 to 7 Watts (CW) user adjustable in 0.2 Watt steps; 10 Watts avg ± 1 dB @ 90% AM
- **Modulation: 0 - 95% user adjustable**
- **Distortion: $< 10\%$ (2.5% typical)**
- **Spurious output: < -85 dBc**
- **Harmonic output: < -75 dBc**
- **Adjacent Channel Power:**
 - 25 kHz: ≤ 60 dB
 - 8.33 kHz: ≤ 50 dB

Physical Characteristics

- **Weight:**
 - 10.9 lbs. (less battery)
- **Dimensions:**
 - 10.6" L x 8.5" W x 3.5" H (without battery and handles)
- **Environmental:**
 - Ruggedized. Environmentally tested for humidity, vibration, shock/drop, rain/drip-proof, temperature and altitude. Complies with sections of MIL-STD-810H and is rated IP65 for ingress protection
- **Temperature:**
 - -20°C to +55°C (operating)
 - -50°C to +70°C (non operating)

Power Supply

- **Battery:**
 - BB-2590 (rechargeable)
- **AC:**
 - 90 - 260 VAC, 47 - 63 Hz
- **DC:**
 - 10.7 - 34 VDC
- **Battery case dimensions:**
 - 5.2" L x 10.3" W x 2.8" H
- **Current drain (+28 VDC):**
 - Transmit: < 2.5 amps
 - Receive: < 360 mA

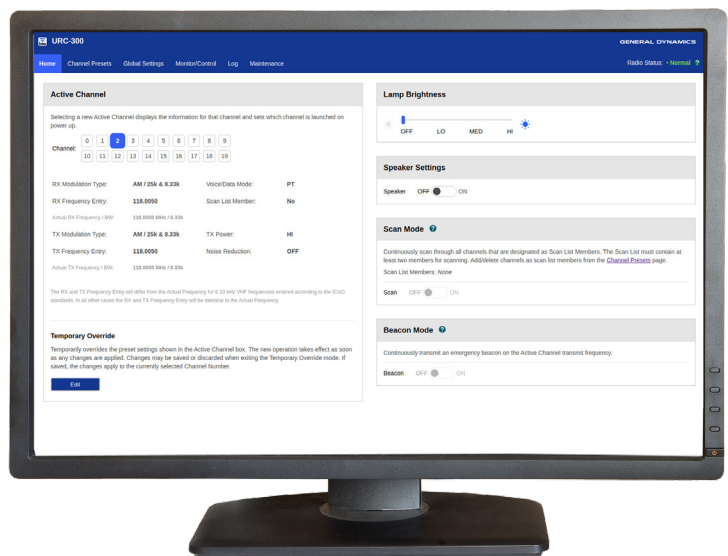

Web-based provisioning tool for maintainers.

GENERAL DYNAMICS

Mission Systems

Phone 800-424-0052 • URC300info@gd-ms.com • gdmissionsystems.com/urc300

©2021 General Dynamics. All rights reserved. General Dynamics reserves the right to make changes in its products and specifications at anytime and without notice. All trademarks indicated as such herein are trademarks of General Dynamics. All other product and service names are the property of their respective owners. © Reg. U.S. Pat. and Tm. Off.

PRI-1908-0008
D-URC-300-08-0521