

VoIP Adapter (VOAD) Gateway

Translating Analog Devices to a Voice over IP (VoIP) Infrastructure



Single VOAD shown in 3 slot 1U drawer

Designed for analog to VoIP translation

Configurable to translate audio for radios or voice switches

EUROCAE ED-137 compatible

Simple Network Management Protocol (SNMP) V1, V2c and V3 for supervision

2 Ethernet ports

Compatible with the GD Remote Control Unit (RCU)

Overview

The General Dynamics VoIP Adapter (VOAD) is a Voice over Internet Protocol Gateway that interfaces analog voice channels to and from an IP system. The VOAD can be configured to transition analog voice for a radio (GRS) or a Voice Switch (VCS) to a VoIP system.

VOAD interfacing capabilities include:

- GD CM-300(V2) series VoIP radios to a legacy analog voice communications system (VCS)
- GD Remote Control Unit to GD CM-300 (V2) VoIP radios
- GD URC-200 or GD CM-300 (V1) analog radios to an IP network


VOAD modules can be used as standalone units or inserted into a standard 1U support frame, with up to 3 VOAD modules available per drawer.

The VOAD is compatible with the EUROCAE ED-137 standard.

VoIP Adapter (VOAD) Gateway

Technical Specifications

- **Standards**
 - EUROCAE ED-137
 - SNMP
- **Analog Audio interface**
 - Max audio input level: +10dBm / 600 Ω
 - Programmable audio output level: -30 to 0 dBm / 600 Ω
- **IP technology**
 - VoIP
 - SNMP
 - 2 Ethernet ports
- **Mechanical characteristics of the module**
 - Width: 5.5 in
 - Overall depth: 17 in
 - Height: 1.75 in, (1U)
 - Weight: 2.5 lb
- **Mechanical characteristics of the rack mountable frame**
 - Width: 19 in
 - Overall depth: 17 in
 - Height: 1.75 in (1U)
 - Weight: 2 lb
- **Environmental**
 - Operating: between -20°C and +55°C
 - Relative humidity: 95 % at +40°C (noncondensing)
 - Storage: from -30°C to +80°C
- **Power (per VOAD)**
 - 24 VDC (21-31 VDC)
 - < 1.5A
 - Power converter for 110/220 50/60 Hz operation included
- **Cables**
 - Interface cables available
- **Hardware Configurations Available**
 - Available with 1, 2 or 3 VOADs in a 1U 19" rack mountable frame

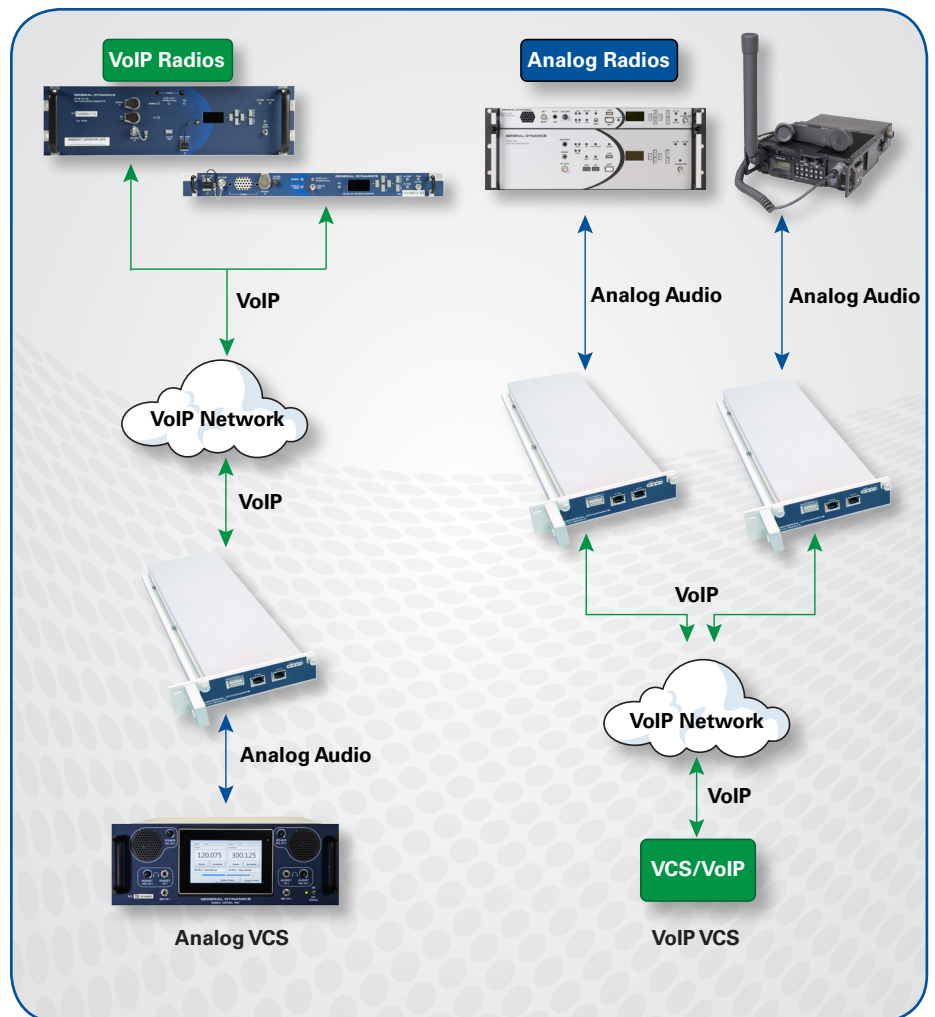

GENERAL DYNAMICS
Mission Systems

info@gd-ms.com • GDMissionSystems.com

US & Canada: 1-877-449-0600 • Global: Your AT&T Country Code + 877-466-9467 • DSN: 312-282-1048

©2018 General Dynamics. All rights reserved. General Dynamics reserves the right to make changes in its products and specifications at anytime and without notice. All trademarks indicated as such herein are trademarks of General Dynamics. All other product and service names are the property of their respective owners. © Reg. U.S. Pat. and Tm. Off.

D-VoIPAnalogDigitalGateway-04-1118-