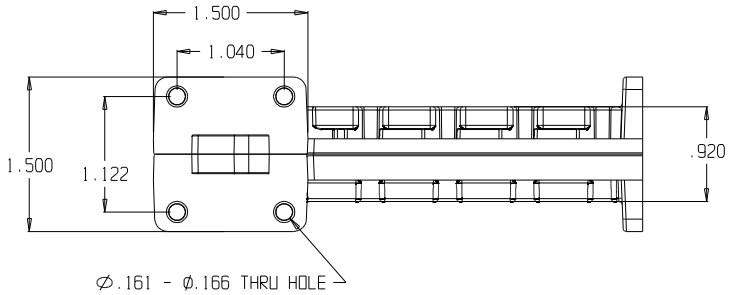

PART NUMBER	0183-645	
SPECIFICATION	Tx	Rx
FREQUENCY	13.75-14.50 GHz	10.70-12.75 GHz
ISOLATION	> 60 dB	N/A
INSERTION LOSS	-	.4 dB MAXIMUM
RETURN LOSS	17.7 dB MINIMUM	

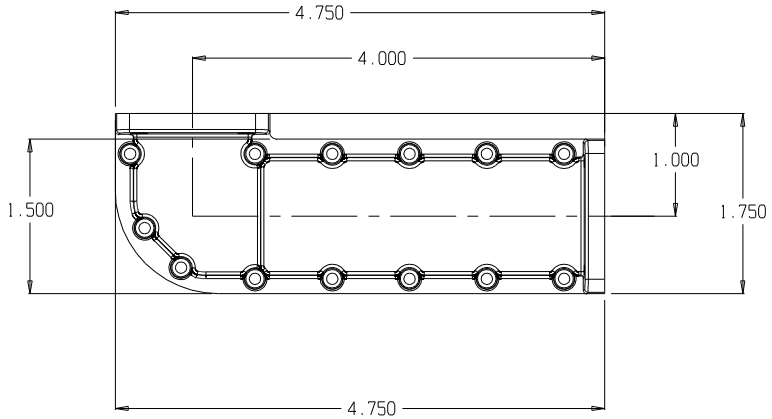

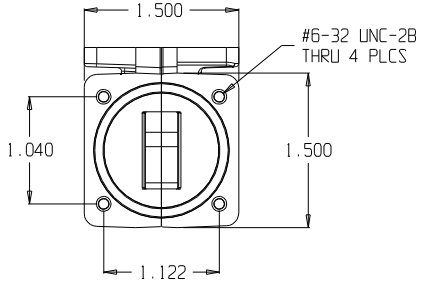

PRODELIN®
GENERAL DYNAMICS

DIMENSIONS ARE IN DECIMAL INCHES. UNLESS OTHERWISE NOTED
TOLERANCES ON FINISHED DIMENSIONS ARE AS FOLLOWS:
.X = ± .1 .XXX = ± .010
.XX = ± .05 ANGULAR ± 1°

TITLE
ASSEMBLY, FILTER/BEND,
TX/REJECT, KU-BAND

Prodelin's drawings, sketches, computer programs, plans, specifications, technical data, prototype products, blueprints, photographs, instructions, diagrams, models, formulae, tables, engineering designs, diskettes, tapes, software, other electronic media (defined to include, but not be limited to, the system functional design, logic flow, algorithms, application programs, operating systems, software design implementation, tests, test results, operation, diagnosis, repair...) and/or documents or other information that was incorporated into the Proprietary Materials come from a customer or third party and whether such Proprietary Materials do or do not constitute intellectual property, patent, trademark or copyright rights or material. THESE "PROPRIETARY MATERIALS" MAY NOT BE COPIED, REPRODUCED, DISCLOSED OR DISTRIBUTED IN WHOLE OR IN PART TO OTHER PARTIES EITHER VERBALLY OR IN WRITING WITHOUT PRIOR WRITTEN APPROVAL BEING OBTAINED FROM THE PRODELIN DOCUMENTATION SUPERVISOR OR A DULY AUTHORIZED REPRESENTATIVE.

MATERIAL: SEE NOTE 2		FINISH: SEE NOTE 3
NEXT ASS'Y		CODE IDENT. NO. 94661
DRAWN 1/15/09	BY KLM	TD0595 REV.
CHECKED	BY	
ENGR.	BY	
MFG APVD	BY	SCALE 1 : 1 SH. 1 OF 1